


Job Name:

System Reference:

Date:

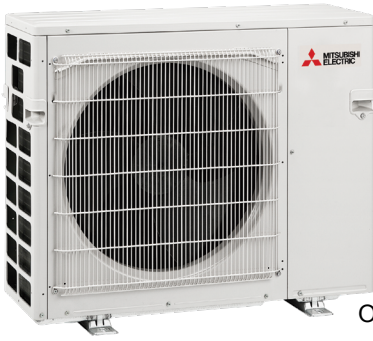

Outdoor Unit: MXZ-3C24NA2

ACCESSORIES

- 3/8" x 1/2" Port Adapter (MAC-A454JP-E)
- 1/2" x 3/8" Port Adapter (MAC-A455JP-E)
- 1/2" x 5/8" Port Adapter (MAC-A456JP-E)
- M-NET Adapter (PAC-IF01MNT-E)
- Base Heater (PAC-645BH-E)

(For data on specific indoor units, see the MXZ-C Technical and Service Manual.)

Specifications			Model Name
Unit Type			MXZ-3C24NA2
Cooling* (Non-ducted / Ducted)	Rated Capacity	Btu/h	22,000 / 23,600
	Capacity Range	Btu/h	9,500 - 22,000 / 9,500 - 25,500
	Rated Total Input	W	1,620 / 2,100
Heating at 47°F* (Non-ducted / Ducted)	Rated Capacity	Btu/h	25,000 / 24,600
	Capacity Range	Btu/h	15,500 - 30,600 / 15,500 - 29,400
	Rated Total Input	W	1,750 / 1,900
Heating at 17°F* (Non-ducted/Ducted)	Rated Capacity	Btu/h	14,000 / 14,000
	Rated Total Input	W	2,120 / 2,230
Connectable Capacity		Btu/h	12,000 - 27,000
Energy Star® (ENERGY STAR products are third-party certified by an EPA-recognized Certification Body.)			Yes
Electrical Requirements	Power Supply	Voltage, Phase, Hertz	208 / 230V, 1-Phase, 60 Hz
	Recommended Fuse/Breaker Size	A	25
	MCA	A	22.1
Voltage	Indoor - Outdoor S1-S2	V	AC 208 / 230
	Indoor - Outdoor S2-S3	V	DC ±24
Compressor			INVERTER-driven Scroll Hermetic
Fan Motor (ECM)		F.L.A.	2.43
Sound Pressure Level	Cooling	dB(A)	51
	Heating	dB(A)	55
External Dimensions (H x W x D)		In mm	31-11/32 x 37-13/32 x 13 (796 x 950 x 330)
Net Weight		Lbs / kg	137 (62)
External Finish			Munsell No. 3Y 7.8/11
Refrigerant Pipe Size O.D.	Liquid (High Pressure)	In / mm	1/4 (6.35)
	Gas (Low Pressure)	In / mm	A Port: 1/2 (12.7) ; Other: 3/8 (9.52)
Max. Refrigerant Line Length		Ft / m	230 (70)
Max. Piping Length for Each Indoor Unit		Ft / m	82 (25)
Max. Refrigerant Pipe Height Difference	If IDU is Above ODU	Ft / m	49 (15)
	If IDU is Below ODU	Ft / m	49 (15)
Connection Method			Flared/Flared
Refrigerant			R410A

* Rating Conditions per AHRI Standard:

Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB

Cooling | Outdoor: 95° F (35° C) DB / 23.9° C (75° F) WB

Heating at 47°F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB

Heating at 47°F | Outdoor: 47° F (8° C) DB / 43° F (6° C) WB

Heating at 17° F | Indoor: 70° F (21° C) DB

Heating at 17° F | Outdoor: 17° F (-8° C) DB / 15° F (-9° C) WB

SPECIFICATIONS: MXZ-3C24NA2

OPERATING RANGE:

	Outdoor
Cooling	14 to 115° F (-10 to 46° C) DB
Heating	5 to 65° F (-15 to 18° C) WB

ENERGY EFFICIENCIES:

Indoor Unit Type	SEER	EER	HSPF	COP @ 47°F	COP @ 17°F
Non-ducted (06+09+09)	20.0	13.6	9.8	4.2	2.97
Ducted and Non-ducted	18.0	12.4	9.5	4.0	2.79
Ducted (09+09+09)	16.0	11.2	9.2	3.8	2.61

NOTES:

- Minimum of two Indoor Units must be connected to the MXZ-3C24NA2.
- Minimum installed capacity cannot be less than 12,000 Btu/h.
- Total connected capacity must not exceed 130% of outdoor unit capacity.
- System can operate with only one Indoor Unit turned on.
- Information provided at 208/230V.
- For Reference:
 - MXZ-C Technical & Service Manual for detailed specifications and additional information per Indoor Unit Combination.
 - MXZ Series Multi-Zone Indoor/Outdoor Combination Table for allowed unit combinations.

MVZ CONNECTION RULES:

- Only 1 MVZ may be used on any system.
- When an MVZ is connected, total connected capacity must be 100% or less.
- When an MVZ is connected, no P-Series indoor units can be used (PCA, PLA, or PEAD).

NOTES:

MXZ-3C24NA2 OPERATIONAL PERFORMANCE

NON-DUCTED:

# of indoor unit	Total Nominal Capacity (x1000 Btu/h)	Total Indoor Unit Capacity (Btu/h)	Operational Performance for Indoor Unit Combinations (Unit A + Unit B + Unit C)	Cooling Capacity Range (Btu/h)		
				Heating Capacity Range (Btu/h)		
				Unit A	Unit B	Unit C
1	6	6,000	6	6,000	-	-
		7,400		7,400	-	-
1	9	9,000	9	9,000	-	-
		11,000		11,000	-	-
1	12	12,000	12	12,000	-	-
		14,400		14,400	-	-
1	15	14,000	15	14,000	-	-
		18,000		18,000	-	-
1	18	17,200	18	17,200	-	-
		21,600		21,600	-	-
2	12	12,000	6 + 6	6,000	6,000	-
		14,800		7,400	7,400	-
2	15	14,000	6 + 9	5,600	8,400	-
		18,400		7,400	11,000	-
2	18	18,000	6 + 12	6,000	12,000	-
		22,000		7,500	14,500	-
2	18	18,000	9 + 9	9,000	9,000	-
		22,000		11,000	11,000	-
2	21	20,000	6 + 15	6,000	14,000	-
		22,000		6,400	15,600	-
2	21	20,000	9 + 12	8,600	11,400	-
		22,000		9,500	12,500	-
2	24	21,800	6 + 18	5,600	16,200	-
		24,000		6,100	17,900	-
2	24	21,800	12 + 12	10,900	10,900	-
		24,000		12,000	12,000	-
2	24	21,800	9 + 15	8,500	13,300	-
		24,000		9,100	14,900	-
2	27	21,800	9 + 18	7,500	14,300	-
		24,000		8,100	15,900	-
2	27	21,800	12 + 15	10,100	11,700	-
		24,000		10,700	13,300	-
3	18	18,000	6 + 6 + 6	6,000	6,000	6,000
		22,000		7,300	7,300	7,300
3	21	21,000	6 + 6 + 9	6,000	6,000	9,000
		24,800		7,100	7,100	10,600
3	24	22,000	6 + 6 + 12	5,500	5,500	11,000
		25,000		6,300	6,300	12,300
3	24	22,000	6 + 9 + 9	5,500	8,300	8,300
		25,000		6,300	9,400	9,400
3	27	24,000	6 + 6 + 15	5,500	5,500	12,900
		25,000		5,600	5,600	13,700
3	27	24,000	6 + 9 + 12	5,300	8,000	10,700
		25,000		5,600	8,400	11,000
3	27	24,000	9 + 9 + 9	8,000	8,000	8,000
		25,000		8,300	8,300	8,300

MXZ-3C24NA2 OPERATIONAL PERFORMANCE, CONTD.

DUCTED:

# of indoor unit	Total Nominal Capacity (x1000 Btu/h)	Total Indoor Unit Capacity (Btu/h)	Operational Performance for Indoor Unit Combinations (Unit A + Unit B + Unit C)	Cooling Capacity Range (Btu/h)		
				Heating Capacity Range (Btu/h)		
				Unit A	Unit B	Unit C
1	9	9,000	9	9,000	-	-
		10,900		10,900	-	-
1	12	12,000	12	12,000	-	-
		13,600		13,600	-	-
1	15	15,000	15	15,000	-	-
		18,000		18,000	-	-
1	18	17,200	18	17,200	-	-
		21,600		21,600	-	-
2	18	18,000	9 + 9	9,000	9,000	-
		21,800		10,900	10,900	-
2	21	21,000	9 + 12	9,000	12,000	-
		22,000		9,800	12,200	-
2	24	21,800	12 + 12	10,900	10,900	-
		24,000		12,000	12,000	-
2	24	21,800	9 + 15	8,200	13,600	-
		24,000		9,100	14,900	-
2	27	21,800	9 + 18	7,500	14,300	-
		24,000		8,000	16,000	-
2	27	21,800	12 + 15	9,700	12,100	-
		24,000		10,300	13,700	-
3	27	21,800	9 + 9 + 9	7,300	7,300	7,300
		24,600		8,200	8,200	8,200

